

# STUDY AND FABRICATION OF MANUALLY OPERATED HANDICAPPED WHEELCHAIR

Jayent Munot<sup>1</sup>, Prajak Dipte<sup>2</sup>, Rahul Chaudhari<sup>3</sup>,  
Sumitsing Baghele<sup>4</sup>, Amit Meshram<sup>5</sup>

<sup>1,2,3,4</sup> BE student, <sup>5</sup> Assistant professor, Mechanical Department, Manoharbhai Patel Institute  
Of Engineering And Technology, Bhandara, Nagpur University, (India)

## ABSTRACT

Traditional manual wheelchair required considerable used and control of both arms for operation, thus adaptation are required for individuals with asymmetrical use of their arm. Building upon provides projects, the goal of this projects was to carried an accessory, to be installed on a standard wheel chair. A large verity of mobility vehicles are available, form which one is to be selected as per requirements. Mobility vehicles are designed based on the usage, i.e. either indoor or outdoor. The cost of vehicle may not be affordable for a common man. So the focus is laid on the simplicity in design, high performance, easy maintenance & safety at very reasonable price. This paper provides detail of component used & designing parameters takes in consideration while designing the tricycle. This tricycle is very efficiently designed and can be proved as a better replacement for the indigenous models used by the handicapped keeping in mind the factors such as safety, cost & performance.

**Keywords:** *asymmetrical, Indigenous, mobility, Tricycle*

## I. INTRODUCTION

Disability could be caused by birth, by injuries sustained mainly from motor accidents or during turnkey project work or in manufacturing industries as well those caused naturally. Due to the enormous number of disabled people in the society, a wheelchair tricycle has been fabricated and designed to specification. In response to demand of wheelchair user for equal access, hand-propelled wheelchair, electrically controlled wheelchair, and automated guided wheelchair have been developed. However, because upper body strength is required, a hand propelled wheelchair does not permit an older or severely disable person on extensive range of travel. The design of a wheelchair tricycle is an improvement on the existing ones. It is carried out to benefit the user conveniently, physically, and comfortably such that when a little effort is exerted, a greater output (movement) is achieved as a result of the fast transmission generated by the single slider mechanism. A hand tricycle works in the same way as a bicycle as it uses a chain system with pedals to drive the wheels, Except in the case of hand tricycle, the chain is attached to hand pedals instead of that we use single slider mechanism which allow the user much more efficient propulsion than would be provided from the hand pedal on wheelchair. The wheelchair is simple in construction, the tricycle wheelchair is easy to operate and the maintenance of wheelchair is very less.

The project's goal is to provide a good living condition for people considered to be physically challenged (disabled), to transport themselves around their environment

## II. WORKING

The tricycle wheelchair is work on the single slider mechanism which is operated by steering. On comparison with old traditional hand pedal wheelchair which have of chain mechanism, instead that we use single slider mechanism. The following fig shows overall view of tricycle.

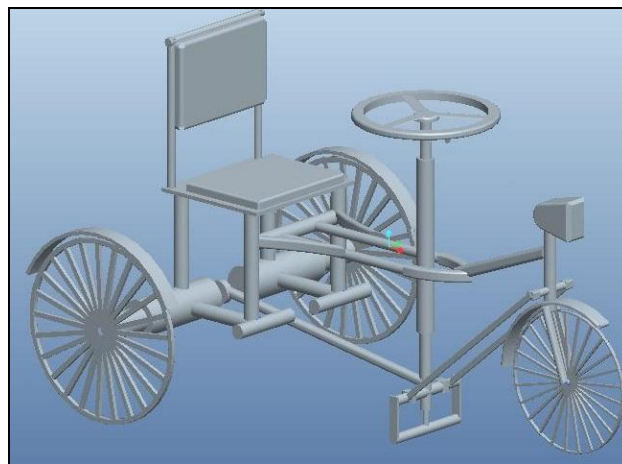


Fig 1: Overall view of tricycle

The above Fig. shows a complete mechanical system in which the single slider mechanism is the main component. On that single slider mechanism a steering is mounted for operating the tricycle, which define the direction to tricycle and used to take turning to the left or right.

## III. WORKING OF SINGLE SLIDER MECHANISM

When we have to go in forward in direction then just move steering from backward to forward with little effort which move the tricycle in forward direction and when we have to go in reverse direction then we have to first stable the tricycle and then move steering from forward to backward in direction which move tricycle in reverse direction. The steering is provided for giving direction and for too & flow motion which move tricycle in forward & reverse direction.

Working of single slider mechanism for forward direction is given as follows:-

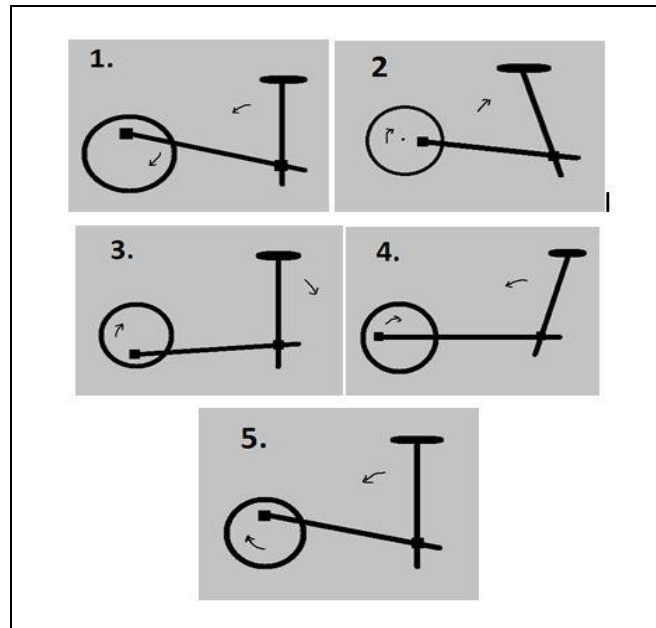


Fig 2: Different Position of Single Slider Mechanism

#### IV. CALCULATION WORK

*Calculation with total weight*

Wt. of tricycle=35 Kg

Wt. of disable people = 60 Kg (maximum condition)

Diameter of wheel = 60cm = 0.6m

N=100 rpm (maximum condition)

$$w = \frac{2\pi \times N}{60}$$

$$= \frac{2 \times \pi \times 100}{60}$$

$$= 10.47 \text{ rad/sec}$$

$$\text{Velocity} = w \times r$$

$$= 10.47 \times 0.3$$

$$= 3.141 \text{ m/sec}$$

*Total force = total weight*

$$= 95 \text{ Kg}$$

$$= 95 \times 9.81$$

$$= 931.95 \text{ N}$$

*On each wheel*

$$F_1 = F_2 = 465.97 \text{ N}$$

$$\text{Torque} = F_1 \times r$$

$$= 465.97 \times 0.3$$

$$= 139.79 \text{ Nm}$$

*So effort required*

$$T = \text{effort} \times \text{dist. of link}$$

$$\text{Effort} = \frac{139.79 \times 10^3}{1200}$$

$$= 116.49 \text{ N}$$

$$= 11.87 \text{ Kg}$$

*For half revaluation*

$$\text{Effort} = 5.93 \text{ Kg}$$

$$\text{Power} = \frac{2\pi NT}{60}$$

$$= \frac{2\pi \times 100 \times 139.79}{60}$$

$$= 1.463 \text{ KW}$$

*Speed*

$$V = 3.14 \text{ m/sec}$$

$$V = 11.3 \text{ Km/hr}$$

*Calculation for diameter of shaft*

*Formula for diameter*

$$T = \frac{\pi \times F_s \times d^3}{16}$$

*Where,*

$$T = \text{torque}$$

$$F_s = S_{us} = \text{ultimate shear strength}$$

$$d = \text{diameter of shaft}$$

*Material for shaft*

*Carbon steel (mild steel)*

SAE 1010 (Hot rolled)

Ultimate tensile strength =  $S_{ut} = 379 \text{ MPa}$

We have relation,

$$S_{us}/S_{ut} = 0.75$$

So we get,

$$S_{us} = F_s = 284.25 \text{ Nmm}^2$$

Therefore,

Diameter of shaft

$$139.79 \times 10^3 = \frac{\pi \times 284.25 \times d^3}{16}$$

$$d=13.58\text{mm}$$

**Std. diameter=15mm**

## V. RESULT ANALYSIS

Wt. of tricycle with steering mechanism=35 kg

Wt. of tricycle with chain mechanism=45 kg

Wt. of disable people=60 kg

### A. For considering total weight (wt. of tricycle + wt. of disable people)

Sr.no	Tricycle with steering mechanism	Tricycle with chain mechanism
Weight	95 kg	105 kg
Force	465.97 N	515 N
Torque	139.79 Nm	154.5 Nm
Power	1.387 KW	1.132 KW
Speed	11.3 Km/hr	7.88 Km/hr

### B. For considering only weight of tricycle

Sr.no	Tricycle with steering mechanism	Tricycle with chain mechanism
Weight	35 Kg	45 Kg
Force	171.67 N	220.77 N
Torque	51.5 Nm	66.2 Nm
Power	0.657 KW	0.623 KW
Speed	13.78 Km/hr	10.238 Km/hr

## VI. CONCLUSION

In our project we utilized single slider mechanisms for operating tricycle hence it is most useful and economical as compared to the other tricycle. This tricycle is made of material which is available easily in market. This tricycle is mostly useful for elder and handicapped people. It is simple in design and easy to operate. The efforts made for operating tricycle is less this is an advantages of this tricycle. The tricycle cost is less as compare to other tricycle.

## REFERENCE

- [1] Giuseppe Quaglia, Walter Franco and Riccardo Oderio (2011), "Wheelchair, Motorized Wheelchair with Stair Climbing Ability", Mechanism and Machine Theory, Vol. 46, No. 11, pp. 1601-1609.
- [2] Murray J Lawn and Takakazu Ishimatsu (2003), "Modeling of a Stair-Climbing Wheelchair Mechanism with High Single Step Capability", Vol. 11, No. 3, pp. 323-332.
- [3] Wang H, Salatin B, Grindle G G, Ding D and Cooper R A (2009), "Real-Time Model Based Electrical Powered Wheelchair Control", Medical Engineering & Amp. Physics, Vol. 31, No. 10, pp. 1244-1254.2006
- [4] Disability status report: United States. Rehabilitation Research and Training Center on Disability Demographics and Statistics, 2006.2008
- [5] Cooper, Rory A., Ken J. Stewart, and David P. VanSickle. "Evaluation of Methods for Determining Static Stability of Manual Wheelchairs". Sacramento: California State University
- [6] Ramesh M. Patelia, Shilpan D. Vyas, Parina S. Vyas, Nayan S. Patel. "AN ENHANCED SELECTION SORT ALGORITHM." International Journal of Advanced Technology in Engineering and Science 3.Special Issue No. 01 (2015): 157-157.